

Weather Cowl


Ø mm	B mm	C mm	Galvanised Steel mm	Weight kg.
125	250	150	0,90	1,50
140	350	190		1,90
150	350	190		1,95
160	350	190		2,10
180	400	220		2,50
200	400	220		2,55
225	500	240		2,60
250	500	240		3,00
300	650	340		5,20
315	650	340		5,30
350	650	340		5,90
400	750	371		8,10
450	750	370		8,20
500	950	440		9,90
550	950	440		10,50
600	1050	480		13,90
630	1050	480		14,00
650	1050	480	14,10	
700	1200	570	21,40	
750	1200	570	21,70	
800	1400	610	1,25	25,60
850	1400	610		25,80
900	1550	680		29,50
950	1550	680		29,80
1000	1700	720	35,90	

Temperature Rating of Product Components		
° C	Weather Cowl	Sealants
200°	Galvanised Steel	Joka Seal Metal Sealant 2315
121°		
-20°		

Additional Notes

At temperatures ranging between 200° C and 250° C, the zinc-iron alloy layers in galvanised steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is 200° C.

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
Weather Cowl	Galvanised Steel	DX51D with Z275 Coating
Joka Seal Metal Sealant 2315	Acetone blend	AAMA Specification 801.1

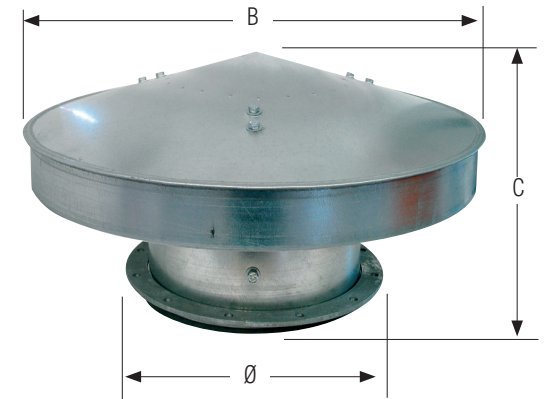

Also supplied in flanged design.