


Ø mm	O/D mm	I/D mm	Length (nom. mm)	Weight kg	Galvanised Steel
350	352	350	1500	11.8	0.9 mm
350	352	350	2000	15.4	
400	402	400	1500	16.4	
400	402	400	2000	21.9	
450	452	450	1500	18.5	
450	452	450	2000	24.6	
500	502	500	1500	20.5	
500	502	500	2000	27.3	
560	562	560	1500	23.0	
560	562	560	2000	30.5	
630	632	630	1500	26.2	
630	632	630	2000	37.2	
710	712	710	1500	29.5	
710	712	710	2000	41.2	
800	802	800	1500	35.4	
800	802	800	2000	48.7	
900	902	900	1500	39.8	
900	902	900	2000	53.8	
1000	1002	1000	1500	44.6	
1000	1002	1000	2000	59.6	

**Construction**  
Longitudinal seam type:  
plasma welded.

**Ends**  
FLN flanged duct.

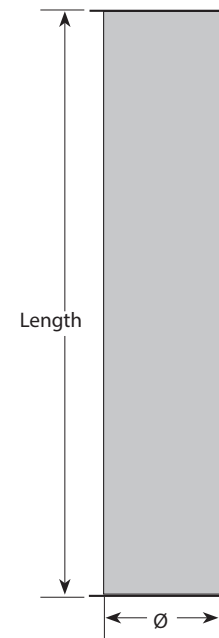

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
FLN Straight Duct	Galvanised	DX51D with Z275 Coating
Joka Seal Metal Sealant 2084	Acetone blend	AAMA Specification 801.1

Temperature Rating of Product Components		
° C	FLN Straight Duct	Sealants
200°	Galvanised Steel	
121°		Joka Seal Metal Sealant 2315
-20°		

**Additional Notes**

At temperatures ranging between 200° C and 250° C, the zinc-iron alloy layers in galvanised steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is 200° C.